

**2 Pole Changeover (DPDT)
30 A Power relay**



66.22 PCB connections & mount
66.82 Faston 250 connections - Flange mount

- Reinforced insulation between coil and contacts according to EN 60335-1; 8 mm creepage and clearance distances
- AC coils & DC coils
- Cadmium Free option available
- ATEX compliant (EX nC) option available

66.22



- 30 A rated contacts
- PCB mount - bifurcated terminals





Copper side view

66.82



- 30 A rated contacts
- Flange mount
- Faston 250 connections



For outline drawing see page 7

FOR UL RATINGS SEE:

"General technical information" page V

Contact specification

| | | | |
|---|-----------|-------------------------|-------------------------|
| Contact configuration | | 2 CO (DPDT) | 2 CO (DPDT) |
| Rated current/Maximum peak current | A | 30/50 (NO) - 10/20 (NC) | 30/50 (NO) - 10/20 (NC) |
| Rated voltage/ Maximum switching voltage | V AC | 250/440 | 250/440 |
| Rated load AC1 | VA | 7500 (NO) - 2500 (NC) | 7500 (NO) - 2500 (NC) |
| Rated load AC15 (230 V AC) | VA | 1200 (NO) | 1200 (NO) |
| Single phase motor rating (230 V AC) | kW | 1.5 (NO) | 1.5 (NO) |
| Breaking capacity DC1: 30/110/220 V | A | 25/0.7/0.3 (NO) | 25/0.7/0.3 (NO) |
| Minimum switching load | mW (V/mA) | 1000 (10/10) | 1000 (10/10) |
| Standard contact material | | AgCdO | AgCdO |

Coil specification

| | | |
|-----------------------------------|-----------------|---|
| Nominal voltage (U _N) | V AC (50/60 Hz) | 6 - 12 - 24 - 110/115 - 120/125 - 230 - 240 |
| | V DC | 6 - 12 - 24 - 110 - 125 |
| Rated power AC/DC | VA (50 Hz)/W | 3.6/1.7 |
| Operating range | AC | (0.8...1.1)U _N |
| | DC | (0.8...1.1)U _N |
| Holding voltage | AC/DC | 0.8 U _N / 0.5 U _N |
| Must drop-out voltage | AC/DC | 0.2 U _N / 0.1 U _N |

Technical data

| | | | |
|--|--------|-----------------------|-----------------------|
| Mechanical life AC/DC | cycles | 10 · 10 ⁶ | 10 · 10 ⁶ |
| Electrical life at rated load AC1 | cycles | 100 · 10 ³ | 100 · 10 ³ |
| Operate/release time | ms | 8/15 | 8/15 |
| Insulation between coil and contacts (1.2/50 μs) | kV | 6 (8 mm) | 6 (8 mm) |
| Dielectric strength between open contacts | V AC | 1500 | 1500 |
| Ambient temperature range | °C | -40...+70 | -40...+70 |
| Environmental protection | | RT II | RT II |

Approvals (according to type)



2 Pole NO (DPST-NO)**30 A Power relay****66.22-x300 PCB mount****66.82-x300 Faston 250 connections****- Flange mount**



- Reinforced insulation between coil and contacts according to EN 60335-1; 8 mm creepage and clearance distances
- AC coils & DC coils
- Cadmium Free option available
- ATEX compliant (EX nC) option available

66.22-x30x



- 30 A rated contacts
- PCB mount - bifurcated terminals

66.82-x30x

- 30 A rated contacts
- Flange mount
- Faston 250 connections



Copper side view



For outline drawing see page 7

FOR UL RATINGS SEE:

"General technical information" page V

Contact specification

| | | | |
|---|-----------|----------------|----------------|
| Contact configuration | | 2 NO (DPST-NO) | 2 NO (DPST-NO) |
| Rated current/Maximum peak current | A | 30/50 | 30/50 |
| Rated voltage/ Maximum switching voltage | V AC | 250/440 | 250/440 |
| Rated load AC1 | VA | 7500 | 7500 |
| Rated load AC15 (230 V AC) | VA | 1200 | 1200 |
| Single phase motor rating (230 V AC) | kW | 1.5 | 1.5 |
| Breaking capacity DC1: 30/110/220 V | A | 25/0.7/0.3 | 25/0.7/0.3 |
| Minimum switching load | mW (V/mA) | 1000 (10/10) | 1000 (10/10) |
| Standard contact material | | AgCdO | AgCdO |

Coil specification

| | | | |
|-----------------------------------|-----------------|---|---|
| Nominal voltage (U _N) | V AC (50/60 Hz) | 6 - 12 - 24 - 110/115 - 120/125 - 230 - 240 | |
| | V DC | 6 - 12 - 24 - 110 - 125 | |
| Rated power AC/DC | VA (50 Hz)/W | 3.6/1.7 | 3.6/1.7 |
| Operating range | AC | (0.8...1.1)U _N | (0.8...1.1)U _N |
| | DC | (0.8...1.1)U _N | (0.8...1.1)U _N |
| Holding voltage | AC/DC | 0.8 U _N / 0.5 U _N | 0.8 U _N / 0.5 U _N |
| Must drop-out voltage | AC/DC | 0.2 U _N / 0.1 U _N | 0.2 U _N / 0.1 U _N |

Technical data

| | | | |
|--|--------|-----------------------|-----------------------|
| Mechanical life AC/DC | cycles | 10 · 10 ⁶ | 10 · 10 ⁶ |
| Electrical life at rated load AC1 | cycles | 100 · 10 ³ | 100 · 10 ³ |
| Operate/release time | ms | 8/10 | 8/10 |
| Insulation between coil and contacts (1.2/50 μs) | kV | 6 (8 mm) | 6 (8 mm) |
| Dielectric strength between open contacts | V AC | 1500 | 1500 |
| Ambient temperature range | °C | -40...+70 | -40...+70 |
| Environmental protection | | RT II | RT II |

Approvals (according to type)

2 Pole NO (DPST-NO), ≥ 1.5 mm contact gap
30 A Power relay



- 66.22-x600 PCB mount
- 66.22-x600S PCB mount - 5 mm gap between PCB and relay base
- 66.82-x600 Faston 250 connections - Flange mount

- ≥ 1.5 mm contact gap (according to VDE 0126-1-1 for solar inverter applications)
- Reinforced insulation between coil and contacts according to EN 60335-1; 8 mm creepage and clearance distances
- Wash tight version (RT III) available
- DC coils
- Cadmium Free option available
- ATEX compliant (EX nC) option available

NEW 66.22-x60x



- PCB mount - bifurcated terminals





Copper side view

NEW 66.22-x60xS



- PCB mount - bifurcated terminals
- 5 mm gap between PCB and relay base





Copper side view

NEW 66.82-x60x



- Flange mount
- Faston 250 connections



For outline drawing see page 7

FOR UL RATINGS SEE:

"General technical information" page V

Contact specification

| | | | | |
|--------------------------------------|-----------|----------------|----------------|----------------|
| Contact configuration | | 2 NO (DPST-NO) | 2 NO (DPST-NO) | 2 NO (DPST-NO) |
| Rated current/Maximum peak current | A | 30/50 | 30/50 | 30/50 |
| Rated voltage/ | | | | |
| Maximum switching voltage | V AC | 250/440 | 250/440 | 250/440 |
| Rated load AC1 | VA | 7500 | 7500 | 7500 |
| Rated load AC15 (230 V AC) | VA | 1200 | 1200 | 1200 |
| Single phase motor rating (230 V AC) | kW | 1.5 | 1.5 | 1.5 |
| Breaking capacity DC1: 30/110/220 V | A | 25/1.2/0.5 | 25/1.2/0.5 | 25/1.2/0.5 |
| Minimum switching load | mW (V/mA) | 1000 (10/10) | 1000 (10/10) | 1000 (10/10) |
| Standard contact material | | AgCdO | AgCdO | AgCdO |


Coil specification

| | | | | |
|---------------------------|-----------------|-------------------------|-------|-------|
| Nominal voltage (U_N) | V AC (50/60 Hz) | — | | |
| | V DC | 6 - 12 - 24 - 110 - 125 | | |
| Rated power AC/DC | VA (50 Hz)/W | —/1.7 | —/1.7 | —/1.7 |
| Operating range | AC | — | | |
| | DC | $(0.8 \dots 1.1) U_N$ | | |
| Holding voltage | AC/DC | $—/0.5 U_N$ | | |
| Must drop-out voltage | AC/DC | $—/0.1 U_N$ | | |

Technical data


| | | | | |
|---|--------------|------------------|------------------|------------------|
| Mechanical life | cycles | $10 \cdot 10^6$ | $10 \cdot 10^6$ | $10 \cdot 10^6$ |
| Electrical life at rated load AC1 | cycles | $100 \cdot 10^3$ | $100 \cdot 10^3$ | $100 \cdot 10^3$ |
| Operate/release time | ms | 15/4 | 15/4 | 15/4 |
| Insulation between coil and contacts (1.2/50 μ s) | kV | 6 (8 mm) | 6 (8 mm) | 6 (8 mm) |
| Dielectric strength between open contacts | V AC | 2500 | 2500 | 2500 |
| Ambient temperature range | $^{\circ}$ C | $-40 \dots +70$ | $-40 \dots +70$ | $-40 \dots +70$ |
| Environmental protection | | RT II | RT II | RT II |

Approvals (according to type)



Ordering information

Example: 66 series relay, Faston 250 (6.3x0.8 mm) with top flange mount, 2 CO (DPDT) 30 A contacts, 24 V DC coil.

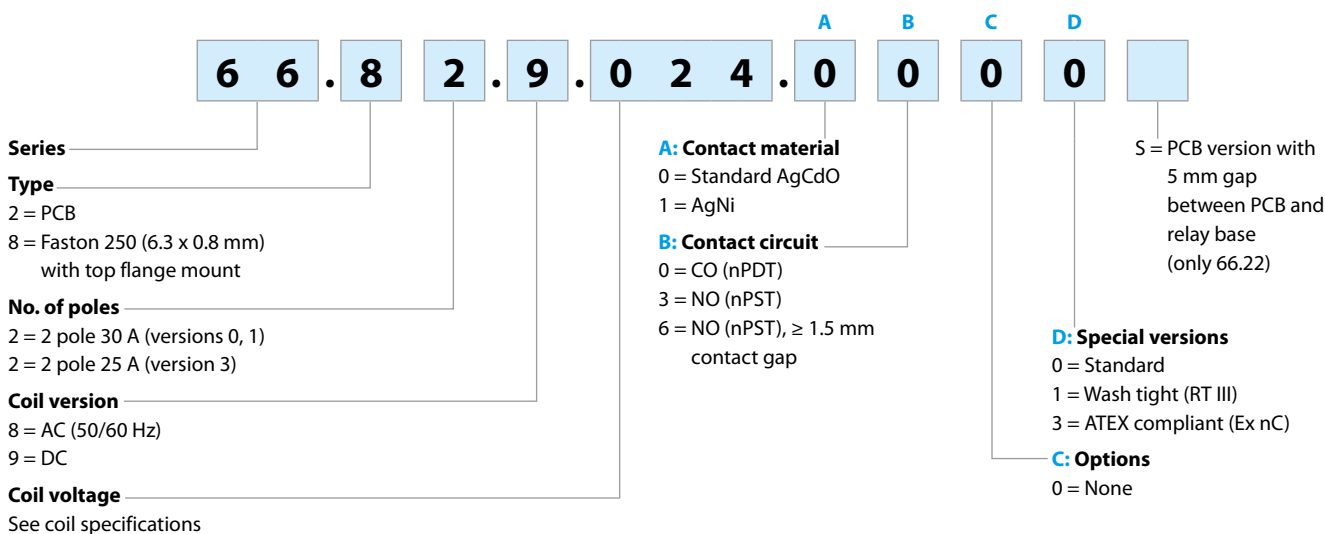

Selecting features and options: only combinations in the same row are possible.

Preferred selections for best availability are shown in **bold**.

| Type | Coil version | A | B | C | D |
|-----------|--------------|--------------|--------------|----------|------------------|
| 66.22 | AC-DC | 0 - 1 | 0 - 3 | 0 | 0 - 1 |
| | DC | 0 - 1 | 6 | 0 | 0 - 1 |
| 66.22...S | DC | 0 - 1 | 6 | 0 | 0 - 1 - 3 |
| 66.82 | AC-DC | 0 - 1 | 0 - 3 | 0 | 0 - 1 - 3 |
| | DC | 0 - 1 | 6 | 0 | 0 - 1 - 3 |

Technical data


Insulation according to EN 61810-1

| | | |
|---|--------------------------|---|
| Nominal voltage of supply system | V AC | 230/400 |
| Rated insulation voltage | V AC | 400 |
| Pollution degree | | 3 |
| Insulation between coil and contact set | | |
| Type of insulation | | Reinforced (8 mm) |
| Overvoltage category | | III |
| Rated impulse voltage | kV (1.2/50 μ s) | 6 |
| Dielectric strength | V AC | 4000 |
| Insulation between adjacent contacts | | |
| Type of insulation | | Basic |
| Overvoltage category | | III |
| Rated impulse voltage | kV (1.2/50 μ s) | 4 |
| Dielectric strength | V AC | 2500 |
| Insulation between open contacts | | |
| Type of disconnection | | 2 CO Micro-disconnection |
| Overvoltage category | | 2 NO, ≥ 1.5 mm (x60x version) Full-disconnection* |
| Rated impulse voltage | kV (1.2/50 μ s) | — |
| Dielectric strength | V AC/kV (1.2/50 μ s) | 1500/2 |
| Conducted disturbance immunity | | |
| Burst (5...50)ns, 5 kHz, on A1 - A2 | EN 61000-4-4 | level 4 (4 kV) |
| Surge (1.2/50 μ s) on A1 - A2 (differential mode) | EN 61000-4-5 | level 4 (4 kV) |
| Other data | | |
| Bounce time: NO/NC | ms | 7/10 |
| Vibration resistance (10...150)Hz: NO/NC | g | 20/19 |
| Shock resistance | g | 20 |
| Power lost to the environment | without contact current | W |
| | with rated current | W |
| Recommended distance between relays mounted on PCB | mm | ≥ 10 |


* Only in applications where over voltage category II is permitted. In applications of over voltage category III: Micro-disconnection.

Contact specification


F 66 - Electrical life (AC) v contact current
250 V (normally open contact)

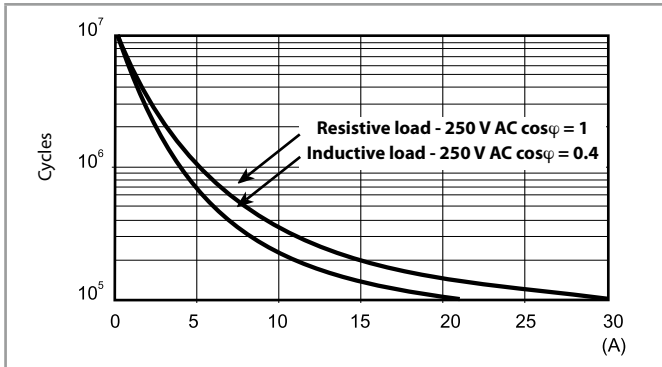


F 66 - Electrical life (AC) v contact current
440 V (normally open contact)

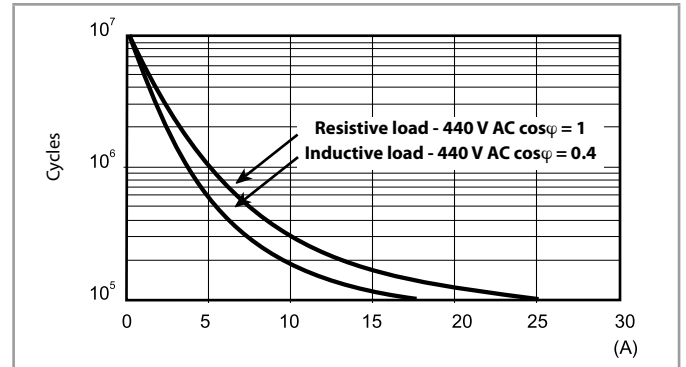

H 66 - Maximum DC breaking capacity

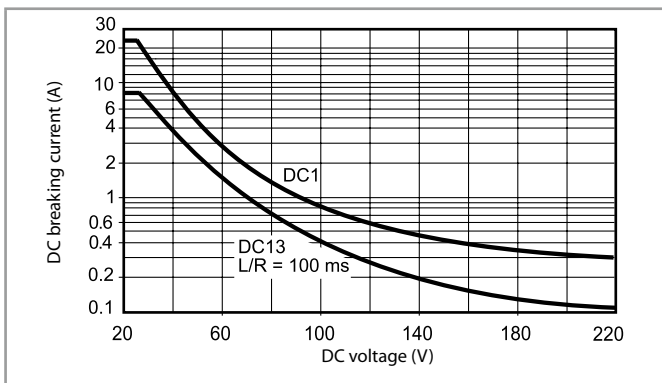

H 66 - Maximum DC breaking capacity, x60x versions
(> 1.5 mm contact gap)

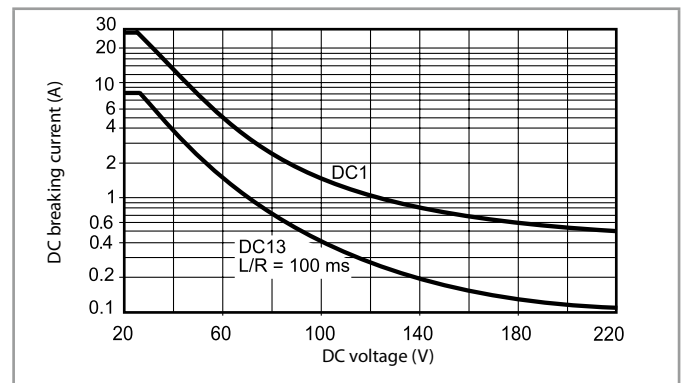

- When switching a resistive load (DC1) having voltage and current values under the curve, an electrical life of $\geq 100 \cdot 10^3$ can be expected.
- In the case of DC13 loads, the connection of a diode in parallel with the load will permit a similar electrical life as for a DC1 load.
Note: the release time for the load will be increased.

Coil specifications


DC coil data

| Nominal voltage U_N V | Coil code | Operating range | | Resistance R Ω | Rated coil Consumption I at U_N mA |
|-------------------------------|-----------|-----------------|----------------|-----------------------------|--|
| | | U_{min} V | U_{max} V | | |
| 6 | 9.006 | 4.8 | 6.6 | 21 | 283 |
| 12 | 9.012 | 9.6 | 13.2 | 85 | 141 |
| 24 | 9.024 | 19.2 | 26.4 | 340 | 70.5 |
| 110 | 9.110 | 88 | 121 | 7000 | 15.7 |
| 125 | 9.125 | 100 | 138 | 9200 | 13.6 |

AC coil data


| Nominal voltage U_N V | Coil code | Operating range | | Resistance R Ω | Rated coil Consumption I at U_N (50 Hz) mA |
|-------------------------------|-----------|-----------------|----------------|-----------------------------|--|
| | | U_{min} V | U_{max} V | | |
| 6 | 8.006 | 4.8 | 6.6 | 3 | 600 |
| 12 | 8.012 | 9.6 | 13.2 | 11 | 300 |
| 24 | 8.024 | 19.2 | 26.4 | 50 | 150 |
| 110/115 | 8.110 | 88 | 126 | 930 | 32.6 |
| 120/125 | 8.120 | 96 | 137 | 1050 | 30 |
| 230 | 8.230 | 184 | 253 | 4000 | 15.7 |
| 240 | 8.240 | 192 | 264 | 5500 | 15 |

R 66 - DC coil operating range v ambient temperature

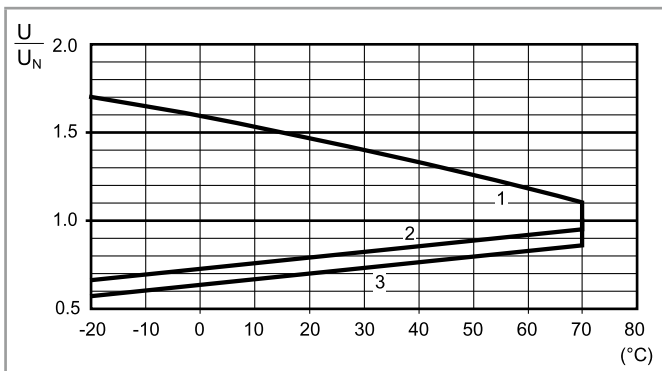

- 1 - Max. permitted coil voltage.
- 2 - Min. pick-up voltage with coil at ambient temperature.
- 3 - Min. pick-up voltage with coil at ambient temperature (66.22-x60x5)

R 66 - AC coil operating range v ambient temperature

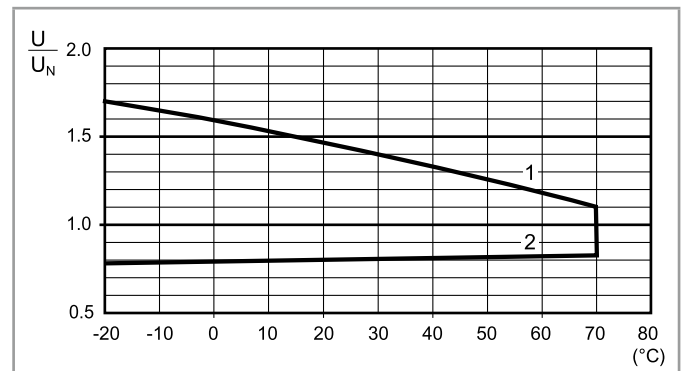

- 1 - Max. permitted coil voltage.
- 2 - Min. pick-up voltage with coil at ambient temperature.

Features compliant variant ATEX, II 3G Ex nC IIC Gc

| | |
|---|--|
| MARKING | |
| | Specific marking of explosion protection |
| II | Component for surface plant (different from mines) |
| 3 | Category 3: normal level of protection |
| GAS | G Explosive atmosphere due to presence of combustible gas vapour or mist |
| | Ex nC Sealed device (type of protection for category 3G) |
| | IIC Gas group |
| | Gc Equipment Protection Level |
| -40 °C ≤ Ta ≤ +70 °C Ambient temperature | |
| EUT 14 ATEX 0150 U EUT: laboratory which issues the CE type certificate 14: year of issue of certificate 0150: number of CE type certificate U: ATEX component | |



Electrical characteristics

Characteristics of terminals

| | | |
|--|------|-------------------------|
| Rated current/Maximum peak current | A | 25/50 (NO) - 10/20 (NC) |
| Rated voltage/Maximum switching voltage | V AC | 250/400 |
| Rated load AC1 | VA | 6250 (NO) - 2500 (NC) |
| Rated load AC15 | VA | 1200 (NO) |
| Capacity for single phase motor (230 V AC) | kW | 1.5 (NO) |
| Breaking capacity DC1: 30/110/220 V | A | 25/0.7/0.3 (NO) |

Characteristics of coil

| | | |
|---------------------------------|-----------------|---|
| Rated voltage (U _N) | V AC (50/60 Hz) | 6 - 12 - 24 - 110/115 - 120/125 - 230 - 240 |
| | V DC | 6 - 12 - 24 - 110 - 125 |
| Rated Power AC/DC | VA (50 Hz)/W | 3.6/1.7 |
| Operating range | AC/DC | (0.8...1.1)U _N |

General characteristics

| | | |
|---------------------|----|-----------|
| Ambient temperature | °C | -40...+70 |
|---------------------|----|-----------|

Special condition for safe use


The component must be placed inside an enclosure that meets the general requirements for enclosures as per clause 6.3 of EN 60079-15. The connections must be made in compliance with the requirements of clause 7.2.4 or 7.2.5 of EN 60079-15.

Wiring

The cross-section of conductors connected to the terminals, must be at least 4 mm² for the Type 66.82.


Layout pcb

The minimum cross-section of the tracks of the printed circuit board must be 0.58 mm², while the width must be at least 4 mm for Types "66.22" and "66.22...S".




Outline drawings


Type 66.22

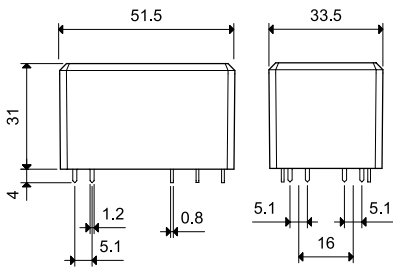


Type 66.82

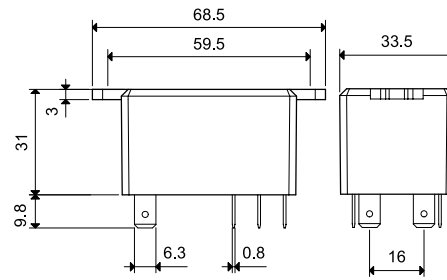


Type 66.22-0300

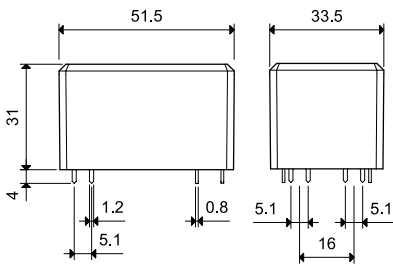


Type 66.82-0300

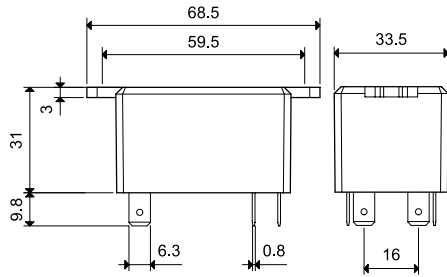


Type 66.22-0600

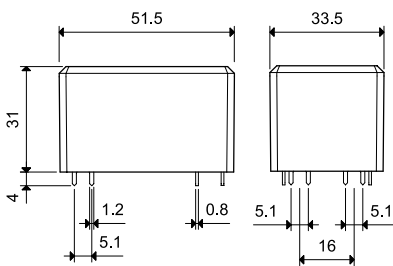

Type 66.82-0600

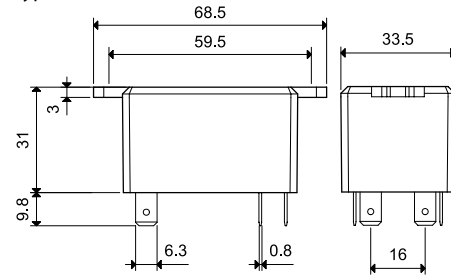

Type 66.22-0600S

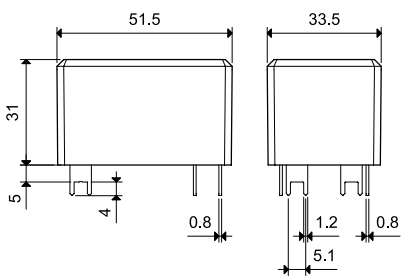

Accessories




066.07





066.07 with relay

Top 35 mm rail (EN 60715) mount for types 66.82.xxxx.0x00

066.07



066.07



066.07 with relay

